TKS | A KABEL DEUTSCHLAND COMPANY

QUICK SETUP GUIDE
ARRIS TG862 CABLE MODEM

MULTIMEDIA OUTLET

DATA

TV   R

Network Name(SSID): ARRIS-3C32
Encrypt AES   Sec Mode WPA2-PSK
Pre-Shared Key: 392A15C9446E37C8

WPS PIN: 90536281

SN: C3HBU792U111280

TG862S/CE
794086

ON/OFF SWITCH

TKS | GETTING CONNECTED

---
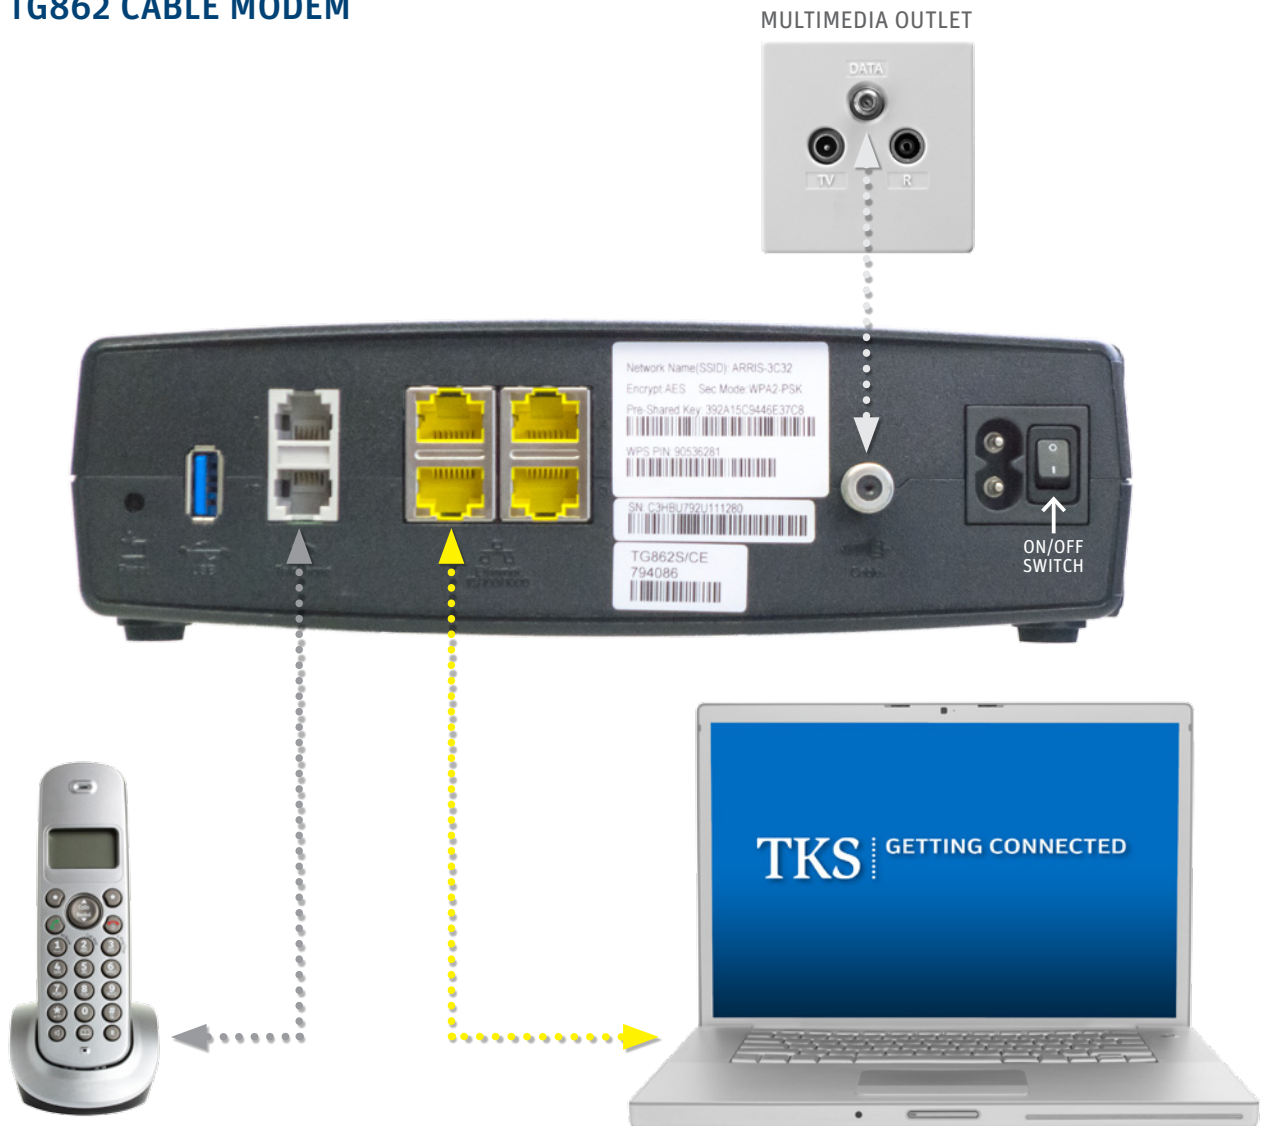
1. CABLE TV OUTLET & POWER
Connect the modem to an active cable TV outlet and to a suitable AC power source, then switch the modem on. Please use only the originally supplied cables.

> NOTE: If your home utilizes 2-way cable TV jacks, please obtain a multimedia adapter at your local TKSShop.

2. COMPUTER
Connect the yellow network cable to the modem, and then to your computer's Ethernet 10/100 network adapter.

NOTE - THE USB PORT IS NOT USED IN THIS SETUP.

3. TELEPHONE
Tel 1/2 - Plug a regular analog telephone into 1/2.
Tel 2 - NOT USED unless a second phone line is ordered.

> TIP: Again, please be sure that your phone is firmly plugged into the lower grey telephone socket labeled 1/2.

4. DONE!
After all the connections are made, the modem will automatically self initiate. This may take a few minutes.

GET ONLINE AND START MAKING CALLS
To begin using your services simply launch your web browser and start surfing and pickup your telephone and dial!

Additional setup guides are available at the TKS website.   www.tkscable.com