


BASE CONNECTION

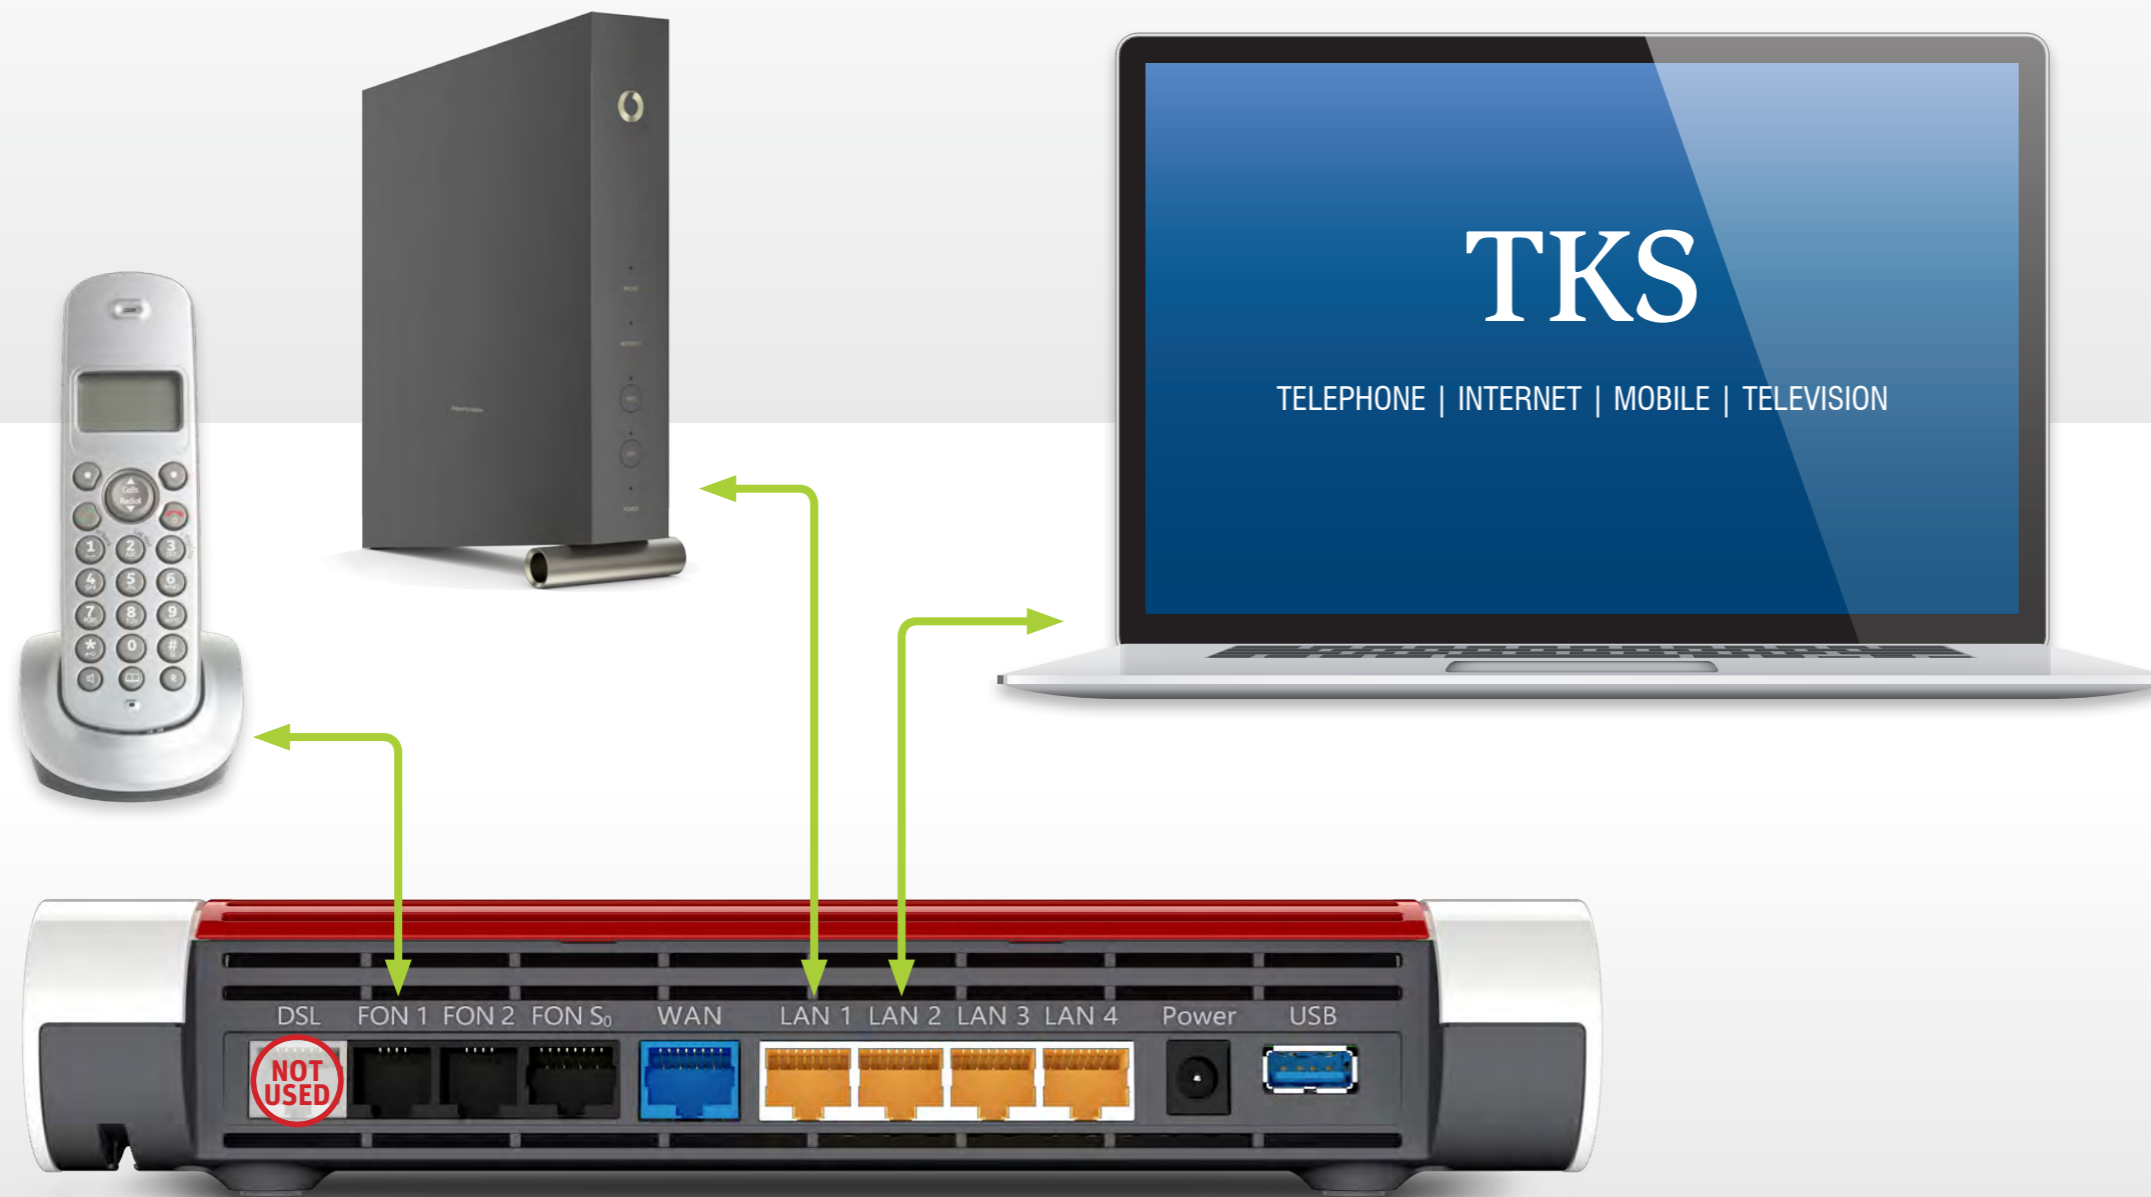

1. BASE CONNECTION [Vodafone]

Your BASE CONNECTION must be activated before you can proceed with your easyConnect set up.

The BASE CONNECTION device will be installed and tested by a Vodafone technician.

2. Power-up and connect to the BASE

Connect the supplied AC adapter to the FRITZ!Box's POWER port and then to a power outlet. The green Power/DSL LED will begin flashing, indicating that the device is powered up.

Connect one of the supplied LAN cables to the FRITZ!Box port labeled LAN 1, then plug the other end into the LAN port on the BASE CONNECTION device.

The FRITZ!Box will automatically self initialize. When the Power/DSL LED stops blinking and the Info LED is illuminated, go to step 3.

3. Connect your telephone and computer.

Plug a standard analog telephone into the FON 1 socket on the back of the FRITZ!Box, or into the German TAE socket labeled FON 1 on the side of the device. Use one FON 1 socket or the other – not both!

No dial tone? Hang up, wait and then retry. It may take a few minutes to establish your initial phone connection.

Connect the second LAN cable to one of the FRITZ!Box LAN ports: LAN 2 | LAN 3 | LAN 4. Plug the other end of the cable into the LAN port of your computer. Launch your web browser and start surfing.

Your setup and activation is now complete!

FRITZ!Box 7590



LAN CABLE [2x]



AC ADAPTER



FRITZ!Box Wi-Fi

Be sure to set up a wired connection per this guide before configuring your home Wi-Fi network. Your modem's default Wi-Fi name or SSID is "FRITZ!Box 7590", the default password can be found on the bottom of the device.

For additional instructions and FRITZ!Box documentation visit the AVM website: <https://en.avm.de/service/>

TKS Customer Service & Technical Support
24-hour support is only a phone call away.

Service Hotline: 0631 3522 499*

www.tkscable.com

TKS A VODAFONE COMPANY

*Standard dialing rates to the German fixed network apply, a free call from the TKS fixed network.